



NP25

# PUMP SUPPLY



**PERFORMANCE\***

30 l/min  
200 bar




**HYDRAULICS**

12,2 kw



**WEIGHT**

60 kg




**DIMENSION**

L/B/H cm  
86/40/67

## Total supplier of high quality high pressure equipment for aquaculture

We offer training on all our products.

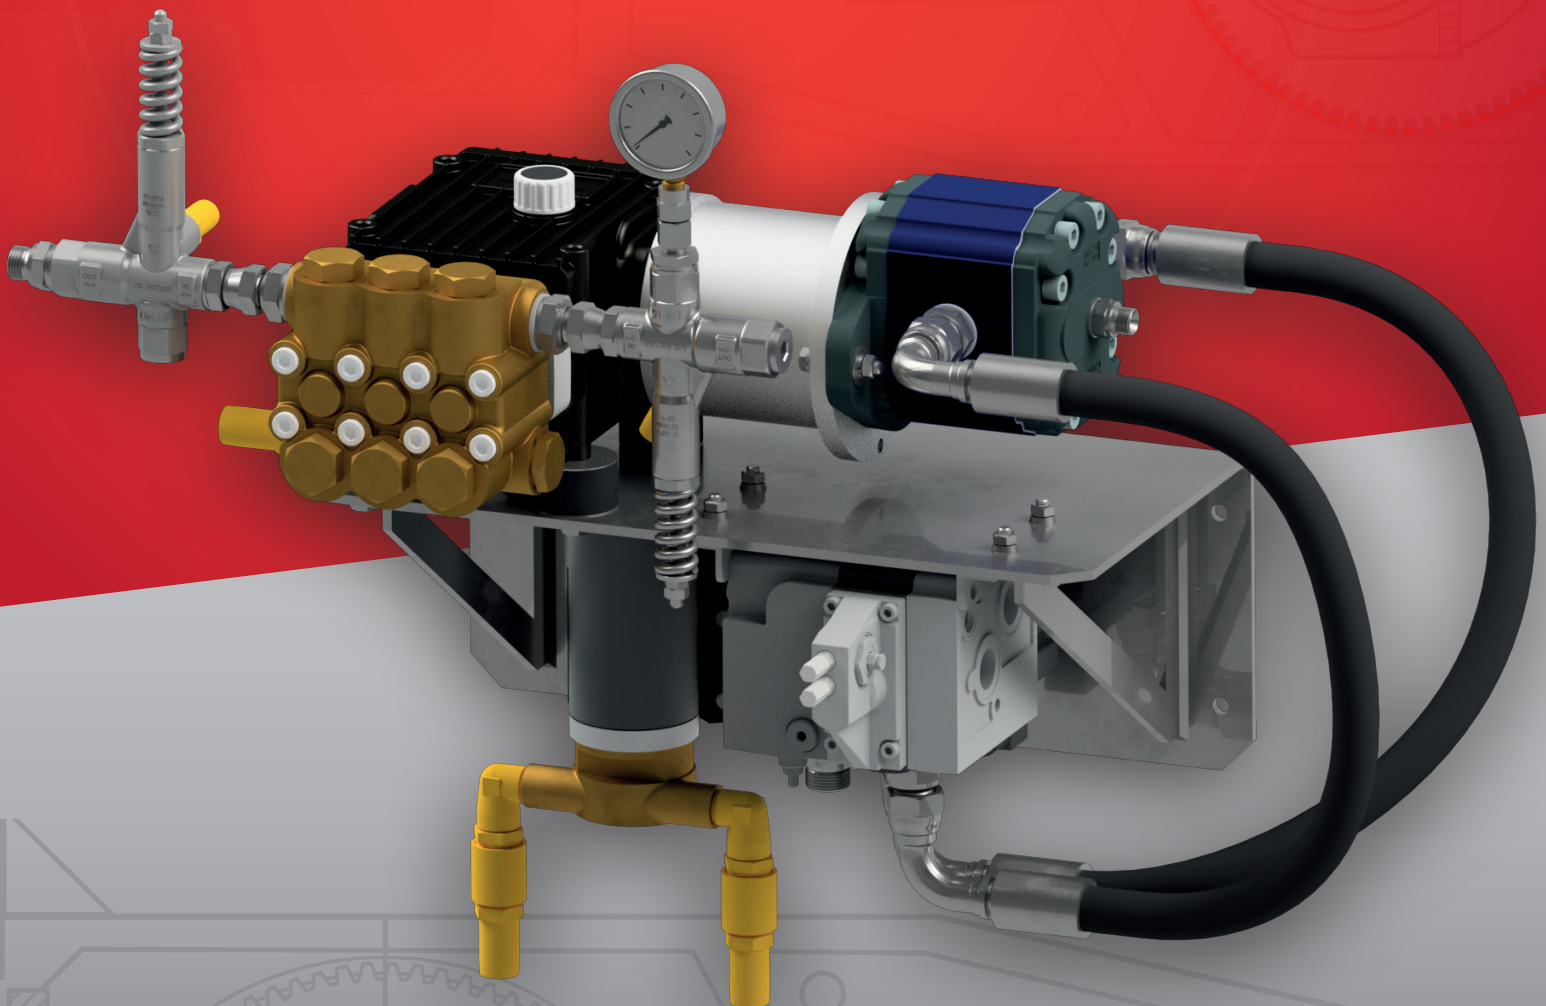

\* See next page for  
optional performances






## TEKNISK DATA

### Speck high pressure piston pump – stainless steel

- Seawater version complet w/ elec.boostpump
- Hydraulic valve
- Safety and unloader valve
- Filterhouse 1" in-outlet
- Hosereel w/25mtr 3/8" hose
- Handgun w/rotornozzle
- Documtation

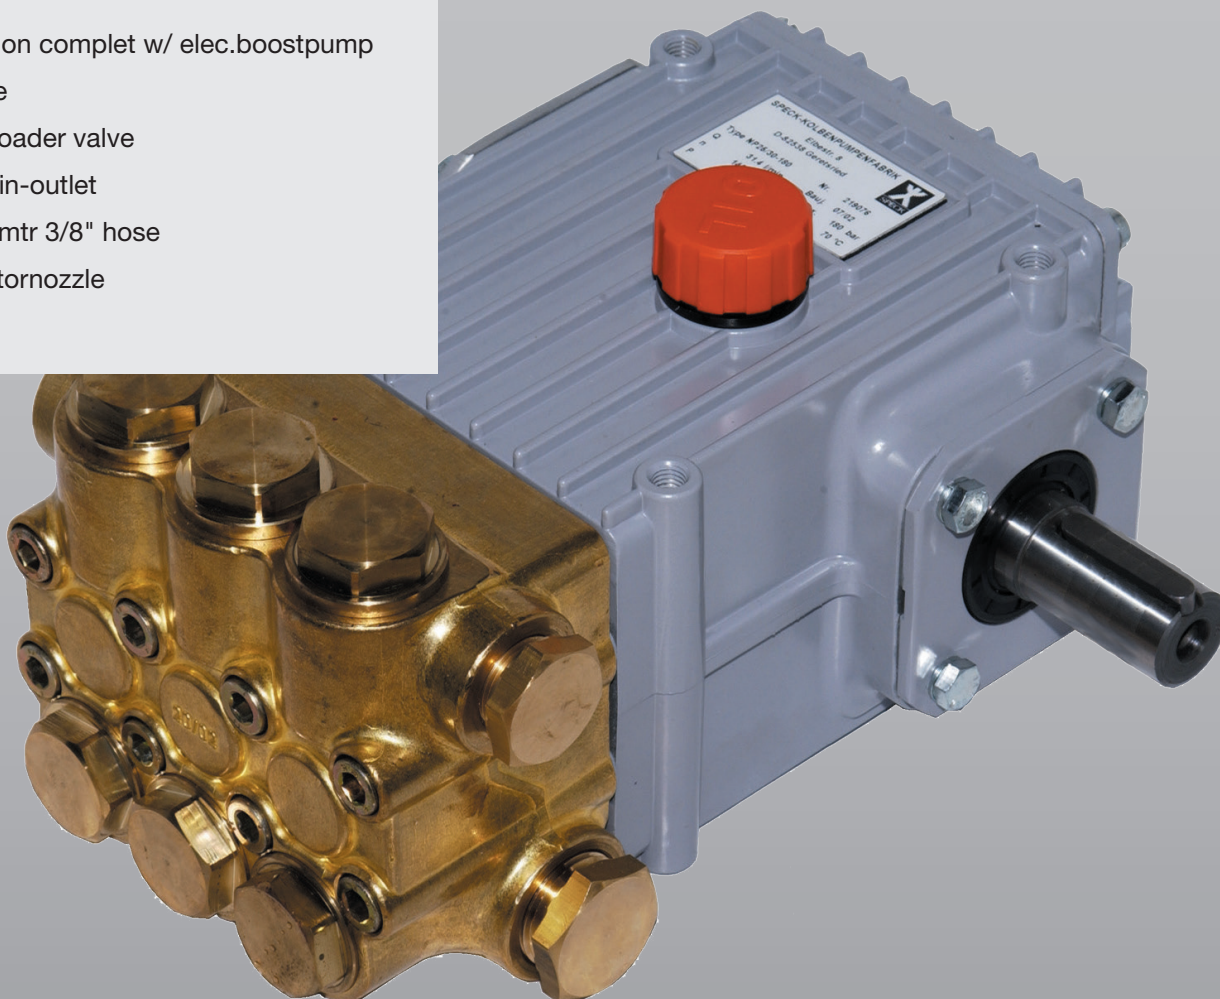

#### FLOW

Volumetrisk tapseffekt er tatt med i beregningene.

Type	Power Consump.	Pressure max.	RPM max.	Output max. L/min	Water-Temp max.	Plunger dia.	Stroke
* NP25/21-350RE	14,3	350	1450	20,8	70	18	20
NP25/30-200RE	12,2	200	1450	31,1	70	22	20
NP25/50-150RE	14,3	150	1450	48,4	70	25	24

Data are for intermittent operation. Data for continuous operation are available on request.  
Intermediate values for output / speed and pressure / output / kW can be established by linear extrapolation.

A general formula for calculating power is:

$$\frac{P \text{ (bar)} \times Q \text{ (l/min)}}{475} = \text{kW}$$

TOTAL SUPPLIER OF HIGH QUALITY HIGH PRESSURE EQUIPMENT,  
PERSONAL PROTECTIVE EQUIPMENT, AS WELL AS DEALER FOR  
ASSOCIATED PRODUCTS.

Pump Supply AS Teglverksveien 59, 3057 Solbergelva  
(+47) 32 27 36 00 post@pumpsupply.no www.pumpsupply.no



**pumpsupply**